


Gewindebohrer



M	ISO 2 +0.1
	HSS-E Co5

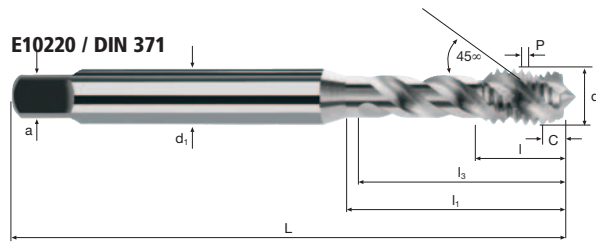

E10221 / DIN 376



M

Rm < 850										Inox Stainless	GG(G) Aluminium Copper
--------------------	--	--	--	--	--	--	--	--	--	--------------------------	-------------------------------------

Beispiel: Bestell-Nr.		Artikel-Nr.		ø-Code							E10220		
		E10220	.034										
Ø Code	d	P	L	l	l ₁	l ₃	d ₁	a		Δ			
.034	M 2	0.40	45	8.0	—	10.5	2.8	2.1	3	+0.100	●		
.040	M 2.5	0.45	50	9.0	—	13.0	2.8	2.1	3	+0.100	●		
.044	M 3	0.50	56	4.0	18.0	16.0	3.5	2.7	3	+0.100	●		
.058	M 4	0.70	63	5.6	21.0	19.0	4.5	3.4	3	+0.100	●		
.084	M 5	0.80	70	6.4	25.0	23.0	6.0	4.9	3	+0.100	●		
.088	M 6	1.00	80	8.0	30.0	28.0	6.0	4.9	3	+0.100	●		
.160	M 8	1.25	90	10.0	35.0	33.0	8.0	6.2	3	+0.100	●		
.174	M10	1.50	100	12.0	39.0	37.0	10.0	8.0	3	+0.100	●		

Beispiel: Bestell-Nr.		Artikel-Nr.		ø-Code							E10221		
		E10221	.240										
Ø Code	d	P	L	l	l ₁	l ₃	d ₁	a		Δ			
.240	M12	1.75	110	14.0	50.0	48.0	9.0	7.0	3	+0.100	●		
.246	M16	2.00	110	16.0	58.0	56.0	12.0	9.0	4	+0.100	●		
.314	M20	2.50	140	20.0	72.0	70.0	16.0	12.0	4	+0.100	●		
.320	M24	3.00	160	24.0	74.0	72.0	18.0	14.5	4	+0.100	●		

