


# Gewindebohrer




**M** ISO 2  
+0.1

 **HSS-E**  
**Co5**

 **DIN**  
371/376 

 **X-P**  
Form C

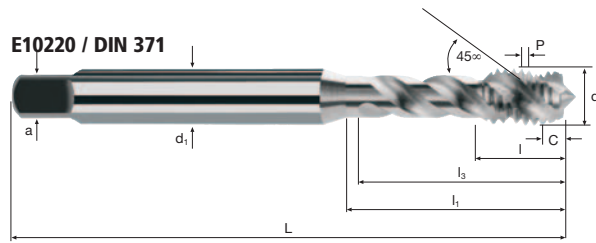



**E10221 / DIN 376**



**M**

**Rm** < 850 **Inox** Stainless **GG(G)** Aluminium Copper

Beispiel: Bestell-Nr.		Artikel-Nr.		ø-Code								<b>E10220</b>	
		<b>E10220</b>		<b>.034</b>									
Ø Code	d	P	L	l	l <sub>1</sub>	l <sub>3</sub>	d <sub>1</sub>	a		Δ			
.034	M 2	0.40	45	8.0	—	10.5	2.8	2.1	3	+0.100	●		
.040	M 2.5	0.45	50	9.0	—	13.0	2.8	2.1	3	+0.100	●		
.044	M 3	0.50	56	4.0	18.0	16.0	3.5	2.7	3	+0.100	●		
.058	M 4	0.70	63	5.6	21.0	19.0	4.5	3.4	3	+0.100	●		
.084	M 5	0.80	70	6.4	25.0	23.0	6.0	4.9	3	+0.100	●		
.088	M 6	1.00	80	8.0	30.0	28.0	6.0	4.9	3	+0.100	●		
.160	M 8	1.25	90	10.0	35.0	33.0	8.0	6.2	3	+0.100	●		
.174	M10	1.50	100	12.0	39.0	37.0	10.0	8.0	3	+0.100	●		

Beispiel: Bestell-Nr.		Artikel-Nr.		ø-Code								<b>E10221</b>	
		<b>E10221</b>		<b>.240</b>									
Ø Code	d	P	L	l	l <sub>1</sub>	l <sub>3</sub>	d <sub>1</sub>	a		Δ			
.240	M12	1.75	110	14.0	50.0	48.0	9.0	7.0	3	+0.100	●		
.246	M16	2.00	110	16.0	58.0	56.0	12.0	9.0	4	+0.100	●		
.314	M20	2.50	140	20.0	72.0	70.0	16.0	12.0	4	+0.100	●		
.320	M24	3.00	160	24.0	74.0	72.0	18.0	14.5	4	+0.100	●		

