



# Zylindrische Fräser NB-NVD

Glattschneidig mit Spanteiler, mittellange Ausführung



**HM**  
**MG10**


$\lambda$  45°  
 $\gamma$  0°

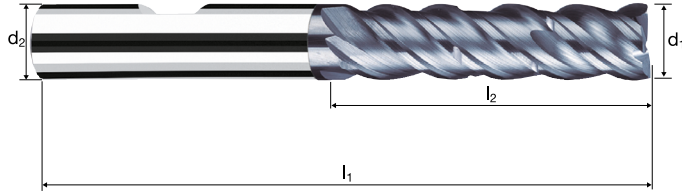

Rm < 850	Rm 850-1100	Rm 1100-1300	Rm 1300-1500				Inox Stainless	Ti Titanium	GG(G) Tool Steel Nickel-Alloys
----------	-------------	--------------	--------------	--	--	--	-------------------	----------------	--------------------------------------

Ø Code	d <sub>1</sub> e <sub>8</sub>	d <sub>2</sub> h <sub>6</sub>	l <sub>1</sub>	l <sub>2</sub>	45°	z	POLYCHROM
							<b>P15310</b>
							<b>P15210</b>
<b>300</b>	6.00	6.00	63	21.00	0.15	4	●
<b>391</b>	8.00	8.00	72	31.00	0.15	4	●
<b>450</b>	10.00	10.00	84	37.00	0.20	4	●
<b>501</b>	12.00	12.00	97	44.00	0.20	4	●
<b>610</b>	16.00	16.00	108	53.00	0.20	4	●
<b>682</b>	20.00	20.00	122	62.00	0.20	4	●

## Anwendung



## Werkstoff

Stahl  
< 850 N/mm<sup>2</sup>




Stahl  
850 - 1100 N/mm<sup>2</sup>



Kaltarbeitsstahl  
(12% Cr)  
hoch legiert  
[1.2379]



Nichtrostender Stahl  
[Cr-Ni/1.4301]



Stahl  
< 850 N/mm<sup>2</sup>



Stahl  
850 - 1100 N/mm<sup>2</sup>



Kaltarbeitsstahl  
(12% Cr)  
hoch legiert  
[1.2379]



Nichtrostender Stahl  
[Cr-Ni/1.4301]



d1 [mm]	z	v <sub>c</sub> [m/min]	f <sub>s</sub> [mm]	a <sub>p</sub> [mm]	a <sub>e</sub> [mm]	n [min <sup>-1</sup> ]	v <sub>r</sub> [mm/min]	Q [cm <sup>3</sup> /min]
6.00	4	180	0.040	10.800	1.200	9550	1530	19.8
8.00	4	180	0.050	14.400	1.600	7160	1430	33.0
10.00	4	180	0.065	18.000	2.000	5730	1490	53.6
12.00	4	180	0.075	21.600	2.400	4775	1430	74.3
16.00	4	180	0.085	28.800	3.200	3580	1220	112.2
20.00	4	180	0.105	36.000	4.000	2865	1205	173.3
6.00	4	140	0.040	10.800	1.200	7425	1190	15.4
8.00	4	140	0.050	14.400	1.600	5570	1115	25.7
10.00	4	140	0.065	18.000	2.000	4455	1160	41.7
12.00	4	140	0.075	21.600	2.400	3715	1115	57.8
16.00	4	140	0.085	28.800	3.200	2785	945	87.3
20.00	4	140	0.105	36.000	4.000	2230	935	134.8
6.00	4	70	0.035	10.800	1.200	3715	520	6.7
8.00	4	70	0.045	14.400	1.600	2785	500	11.6
10.00	4	70	0.060	18.000	2.000	2230	535	19.3
12.00	4	70	0.070	21.600	2.400	1855	520	27.0
16.00	4	70	0.080	28.800	3.200	1395	445	41.1
20.00	4	70	0.100	36.000	4.000	1115	445	64.2
6.00	4	85	0.025	10.800	1.200	4510	450	5.8
8.00	4	85	0.030	14.400	1.600	3380	405	9.4
10.00	4	85	0.040	18.000	2.000	2705	435	15.6
12.00	4	85	0.050	21.600	2.400	2255	450	23.4
16.00	4	85	0.055	28.800	3.200	1690	370	34.3
20.00	4	85	0.070	36.000	4.000	1355	380	54.5
6.00	4	145	0.020	8.100	6.000	7690	615	29.9
8.00	4	145	0.025	10.800	8.000	5770	575	49.8
10.00	4	145	0.035	13.500	10.000	4615	645	87.2
12.00	4	145	0.040	16.200	12.000	3845	615	119.6
16.00	4	145	0.050	19.200	16.000	2885	575	177.2
20.00	4	145	0.060	24.000	20.000	2310	555	265.9
6.00	4	105	0.020	8.100	6.000	5570	445	21.7
8.00	4	105	0.025	10.800	8.000	4180	420	36.1
10.00	4	105	0.035	13.500	10.000	3340	470	63.2
12.00	4	105	0.040	16.200	12.000	2785	445	86.6
16.00	4	105	0.050	19.200	16.000	2090	420	128.3
20.00	4	105	0.060	24.000	20.000	1670	400	192.5
6.00	4	55	0.020	8.100	6.000	2920	235	11.3
8.00	4	55	0.025	10.800	8.000	2190	220	18.9
10.00	4	55	0.030	13.500	10.000	1750	210	28.4
12.00	4	55	0.035	16.200	12.000	1460	205	39.7
16.00	4	55	0.045	19.200	16.000	1095	195	60.5
20.00	4	55	0.055	24.000	20.000	875	195	92.4
6.00	4	65	0.015	8.100	6.000	3450	205	10.1
8.00	4	65	0.020	10.800	8.000	2585	205	17.9
10.00	4	65	0.025	13.500	10.000	2070	205	27.9
12.00	4	65	0.030	16.200	12.000	1725	205	40.2
16.00	4	65	0.035	19.200	16.000	1295	180	55.6
20.00	4	65	0.045	24.000	20.000	1035	185	89.4